


Technical Specifications

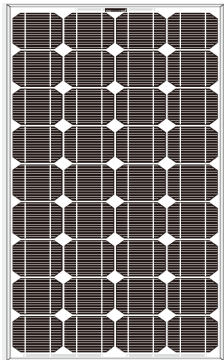

Suntech's STPBb features efficiency of 13% which delivers the maximum power output at peak hours. Ideal for off-grid and remote power systems. With a 25 years warranty, the modules has high efficiency and long-lasting operating time even in a variety of rigorous conditions. Unique textured cell surface and bypass diode design is critical for the module to fully utilize and absorb sunlight and offer maximum usable power per square foot of solar array.

Features and Benefits

- High efficiency
- Normal 12V DC for standard output
- Outstanding low-light performance
- High transparent low-iron, tempered glass
- Unique techniques gives the panel following features: esthetic appearance, which stands high wind-pressure and snow load, and easy installation
- Unique technology ensure that problems of water freezing and wrapping do not occur
- Design to meet unique demand of customer
- 25 year power output warranty

Specification

Cell	Monocrystalline silicon solar cells 125mm×125mm
No. of cells and connections	36(4×9)
Dimension of module	1195mm×541mm×30mm
Weight	8kg

Electrical Characteristics

Model	STP085S-12/Bb	STP080S-12/Bb	STP075S-12/Bb
Open-circuit voltage (Voc)	22.2V	21.9V	21.7V
Optimum operating voltage (Vmp)	17.8V	17.5V	17.3V
Short-circuit current (Isc)	5.15A	4.95A	4.72A
Optimum operating current (Imp)	4.8A	4.58A	4.35A
Maximum power at STC (Pmax)	85Wp	80Wp	75Wp
Operating temperature	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C
Maximum system voltage	715V DC	715V DC	715V DC

STC: Irradiance 1000W/m², Module temperature 25°C, AM=1.5

Xybet Solar Technologies Ltd

No. 5 Adenuga Street, Off U.I / Secretariat Road
Kongi - Bodija, Ibadan. Oyo State. Nigeria.

Plot 172, Oworonsoki Express Way,
Gbagada Phase 1. Lagos State.

